


Through-The-Wall Cooling Systems

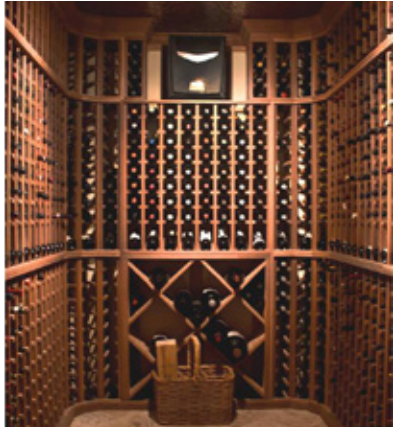

Wine Guardian® TTW Installation.
Courtesy: WineRacks.com

Wine is your passion. Preserving it is ours.

The Through-the-Wall (TTW) wine cellar cooling Unit from Wine Guardian offers a **contemporary design** that will match the unique style of today's modern wine cellar. This small wine cooling unit is available in two capacities, perfect for **small to mid-sized cellars**. This innovative system offers exceptional airflow and maintains optimal **temperature and humidity** with the **quietest** operation in its class.

Quality, sophistication, and a host of other features that are standard to Wine Guardian®

- Commercial-grade, corrosion resistant components long-term durability
- The only TTW system that displays both temperature and humidity and controls temperature
- Quiet and efficient operation
- EasyMount™ one-piece wall bracket and support frame included
- Wine Guardian® TTW Systems can directly replace most competitors through-the-wall models. See your distributor for details.

Options

- Hot air discharge and duct adapter kit
- Remote monitoring and sensing
- Alarm and communication capabilities
- [Factory-configured serving temperature option](#) (TTW018/WG25 only)
- Integrated electric heater



TTW unit out of racking



Made in
the U.S.A.

WG25 conforms to China Compulsory Certification (CCC) standards.

Wine Guardian USA:
1 (800) 825 3268 | 1 (315) 452 7400
wineguardian.com | info@wineguardian.com

Wine Guardian European Office:
Pestalozzistrasse 2, CH-8201 Schaffhausen, Switzerland
+41 (0) 52 224-0490 | tluehr@airinnovations.com

Find a Distributor

Through-The-Wall Cooling Systems




Front View in Racking

Additional Standard Features

- Integrated condensate evaporation system
- Drain overflow connection
- Aluminum, corrosion-resistant cooling coil
- Power cord connections on both sides of system to connect power from front or back of unit
- Engineered for ideal airflow, including adjustable louvers for optimal cellar air circulation
- Can be mounted flush with the wall or racking



Front Digital Display

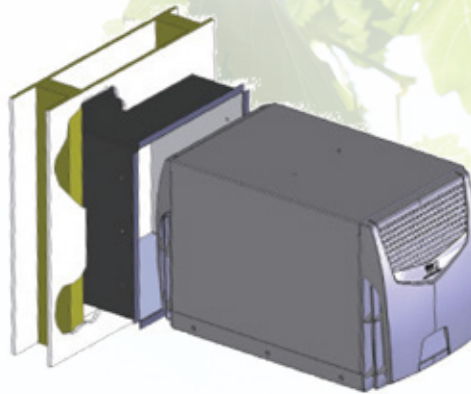

Side view With EasyMount™



Back View With Optional Duct Adapter

System Specifications*

Model	Capacity	Length	Width	Height	Electrical	Weight
TTW009**	600 cu. ft.	25"	14 3/4"	15 7/8"	115v / 1ph / 60Hz	60 lbs
TTW018**	1,200 cu. ft.	25"	14 3/4"	15 7/8"	115v / 1ph / 60Hz	62 lbs
WG15**	20 m ³	63.5 cm	36.2 cm	40.1 cm	220 - 240v / single-phase / 50Hz	27 kg.
WG25**	35 m ³	63.5 cm	36.2 cm	40.1 cm	220 - 240v / single-phase / 50Hz	28 kg.

* Designed for 95°F (35°C) max, 50°F (10°C) min condenser inlet.

Sizing note: Many variables affect proper unit sizing, including type of construction, insulation values, amount of glass, residential vs. commercial applications, etc. Proper unit size should only be determined by using the [Wine Guardian cooling calculator](#). Check with your Wine Guardian authorized distributor for more information.

** Direct replacement for most through-the-wall models. Ask your authorized Wine Guardian® distributor for details.

Wine Guardian® systems are made in the USA.

Manufacturer reserves right, without notice, to make changes to specifications at its sole discretion.

Wine Guardian®

Through-the-Wall Cooling System patents pending. EasyMount™ is a trademark of Air Innovations.

Rev 3/17

Wine Guardian USA:
1 (800) 825 3268 | 1 (315) 452 7400
wineguardian.com | info@wineguardian.com

Wine Guardian European Office:
Pestalozzistrasse 2, CH-8201 Schaffhausen, Switzerland
+41 (0) 52 224-0490 | tluhr@airinnovations.com

Find a Distributor